
PRIMING SCREW KV-4

The KV-4 priming screw is designed to initiate the powder filling charge for artillery ammunition of 100 mm, 122 mm, and 152 mm calibre. It is safe in storage, handling, and operation and ensures the secure and reliable function of the ammunition in all weather conditions.

Main characteristics



Height KV-4	23,8 max.
Diameter KV-4	30 mm max.
Thread KV-4	27,178 x $^{1}/_{14}$ ”
Weight KV-4	74,4 g
Net explosive content	6,7 g
Number of pieces in the box	90 pcs
Number of boxes per pallet	40 pcs
Number of pieces per pallet	3600 pcs
Weight of the pallet	430 kg
NEC in total on the pallet	24,12 kg
Dimensions of the pallet (max.)	1200 x 800 x 515 mm
Classification according to ADR	1.3G
Body strength test pressure	333,4 ±4,9 MPa

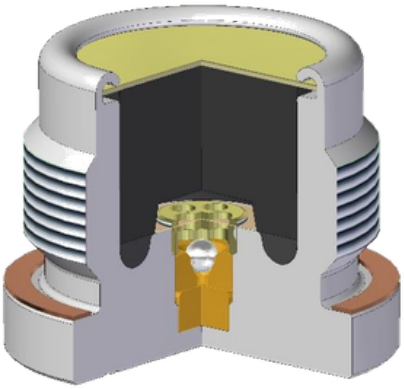



DED Pro, s.r.o.
Holubyho 44/1, 036 01 Martin, Slovak Republic
Tel: 421 908 976 170 · E-mail: info@dedpro.sk
www.dedpro.sk

BIC (SWIFT): GIBASKBX
IBAN (EUR): SK82 0900 0000 0052 0801 6215
Reg. No.: 55781551 · VAT: 2122089376
Company Register of the District Court Žilina, Section Sro, Entry No. 83323/L